


Sleepers for Urban Transit

Prestressed Concrete Sleeper B 2000 W 54 / Ri 60 for Rail fastening W

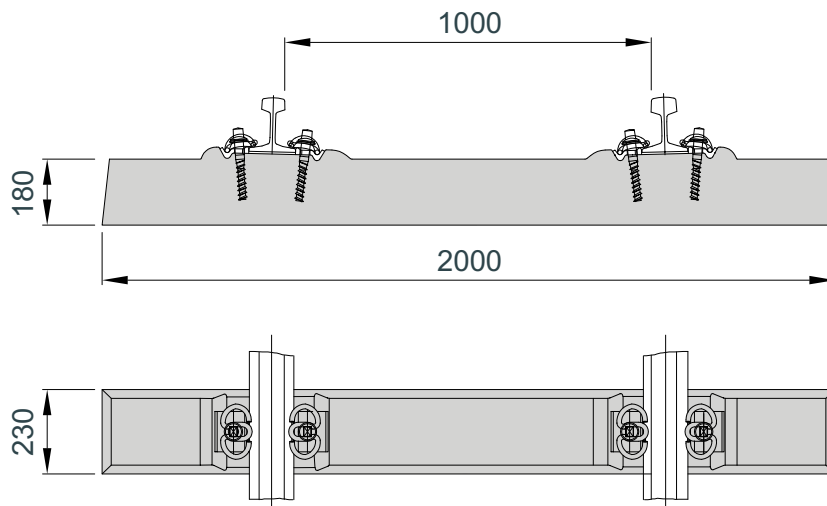

All dimensions in mm

Product information

- Field of application: Narrow gauge tracks
- Permissible wheel set load: According to structural analysis
- Rail inclination: 1:40 / 1:∞
- Track gauge: 1000 mm
- Rail fastening system: W 14
- Rail:
 - 60 Ri 1, RiPh37A rail foot width 180 mm
 - 49 E 1, 54 E 3 rail foot width 125 mm
- Weight: With rail fastening system, approx. 175 kg

Further information

Can also be delivered with sleeper pads to lower the stress on the ballast. Sleeper pads provide vibration protection preserve the ballast under the tracks and lengthen the service life of the track.

Produced according to DIN EN 13230