


Sleepers for Urban Transit

Prestressed Concrete Sleeper B 70 W with Conductor Rail Support for Rail fastening W

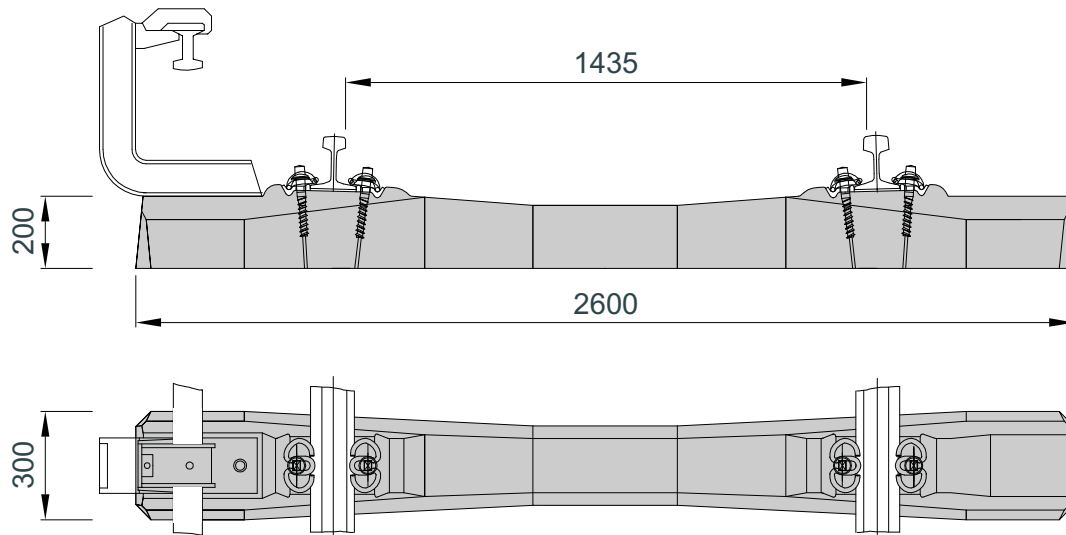

All dimensions in mm

Product information

- Field of application: Urban Transit
- Permissible wheel set load: 250 kN
- Rail inclination: 1:40
- Track gauge: 1435 mm
- Rail fastening system: W 14
- Rail: 49 E 1, 54 E 3 rail foot width 125 mm
- Weight: With rail fastening system, approx. 300 kg

Further information

Can be delivered for all conductor rail systems.

Can also be delivered with sleeper pads to lower the stress on the ballast. Sleeper pads provide vibration protection preserve the ballast under the tracks and lengthen the service life of the track.

Produced according to DIN EN 13230 / Berlin urban railway version according to Deutsche Bahn standard DBS 889.0143