


Sleepers for Urban Transit

Prestressed Concrete Sleeper for Narrow Gauge SSP 750 for Rail fastening W

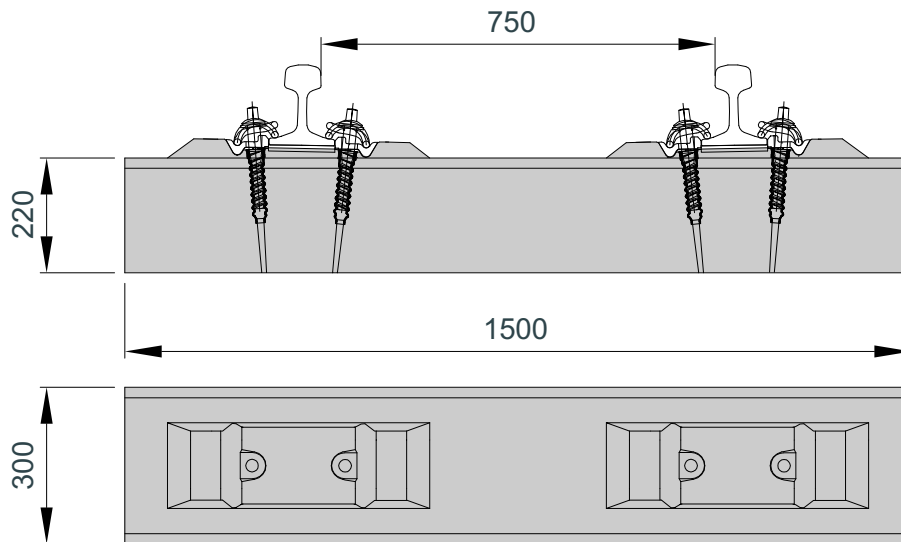

All dimensions in mm

Product information

- Field of application: Narrow gauge tracks
- Permissible wheel set load: 160 kN
- Rail inclination: 1:∞ according to customer specification
- Track gauge: 750 mm
- Rail fastening system: W 14
- Rail: 49 E 1 rail foot width 125 mm or according to customer specification
- Weight: With rail fastening system, approx. 270 kg

Further information

Can also be delivered with sleeper pads to lower the stress on the ballast. Sleeper pads provide vibration protection preserve the ballast under the tracks and lengthen the service life of the track.

Produced according to DIN EN 13230