


Turnout Sleepers

Prestressed Concrete Sleeper B 93 with one-sided or two-sided Securing or Guide Rail for KS-Type

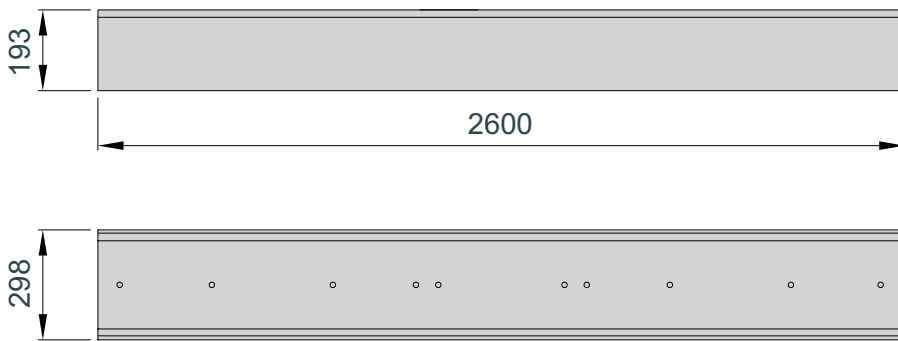

All dimensions in mm

Product information

- Field of application: Turnout
- Permissible wheel set load: 250 kN
- Track gauge: 1435 mm or according to customer specification
- Sleeper length: 2.60 m
- Rail fastening system: KS-type
- Rail: 60 E 1 rail foot width 150 mm
- 49 E 1, 54 E 3 rail foot width 125 mm
- Weight: Without rail fastening system, approx. 180 kg

Further information

Can also be delivered as version for rail expansion joints and/or with fastening system for conductor rail supports.

Produced according to Deutsche Bahn standard DBS 889.0143